



Wedge Meter

PFS- WedgeX 2

PFS-WedgeX 2


Now available and in-stock at all PFS distribution locations is our expanded range of 2.0" and 3.0" flanged end (any rating), wafer type, NPT threaded and victaulic designs. Standard h/d ratios are in-stock and special sizes are available. Materials include carbon steel, 304 and 316 stainless steel.



This is a 2.0" Wedge-X Wafer design which is very cost effective, occupies a very small amount of space and allows for a direct mounted standard 2-1/8" differential pressure transmitter.



This is a 3.0" Wedge-X Wafer design with direct mounted 316 stainless steel instrument manifold (also available with a 5-valve configuration) and differential pressure transmitter.

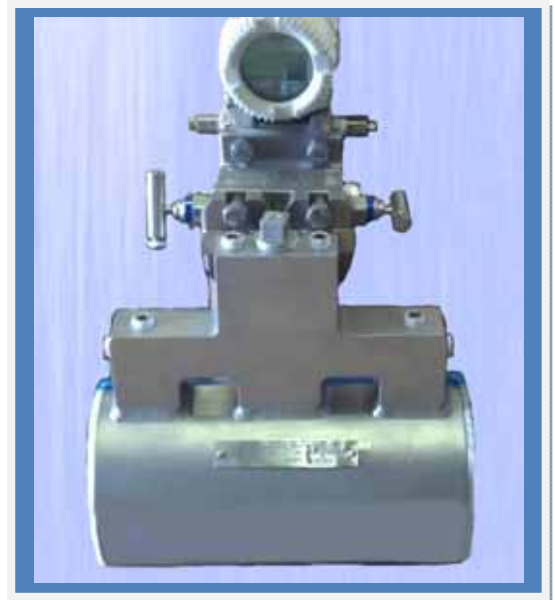

Field Installed

2.0" Wedge-X Wafer with direct mounted 3-valve instrument manifold and dp transmitter on field installation.

